


Introducing the new model **KH150T-20 (VRS150)**



Full Body




Default Board

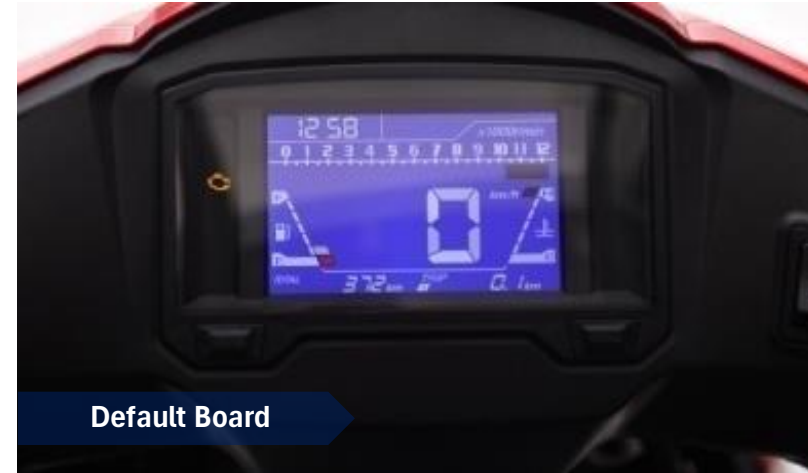


New Function



Back Light

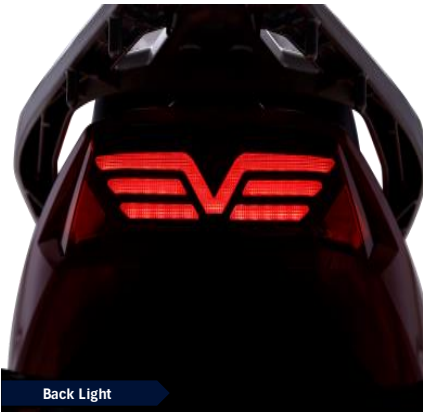

Front Light

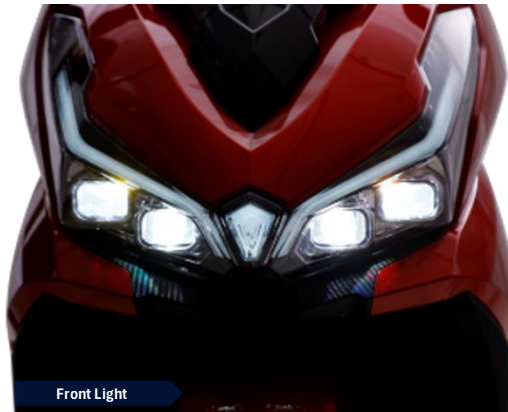




Color






1897 mm



1132 mm



718 mm



Model	KH150T-20 (VRS150)
Version	TCS
Length (mm)	1900
Width (mm)	740
Height (mm)	1140
Wheel base (mm)	1350
Ground clearance (mm)	150
Main seat height (mm)	770
Net weight (Kg)	138
Front wheel	110/70-12
Rear wheel	120/70-12
Oil consumption(L/100km)	2.4
Total Mileage (KM)	415
Fuel tank (L)	10
Headlight/Winker / Taillight	LED
Engine type	liquid cooling
Cylinder diameter x stroke (mm)	52.4x57.7
Compression ratio	11.2:1
Front brake	disc
Rear brake	disc
EVAC	•
ABS system	two-channel
Max power (kW/r/min)	12.1/8500
Max torque (N-m/r/min)	14.6/6500
Idling start-stop	•
USB charger	•
Max Speed (km/h)	115
TCS system	•
Container quantity	CBU 36units/1X40HQ'; CKD 72units/1X40HQ'

EVAC:

1- Technical Introduction:

When refueling, the speed reaches more than 2000 RPM, the program intelligent detection, control ISG magneto to provide electric power to the engine, about 10 seconds

2- Technical Advantages:

Instant acceleration performance is improved, climbing performance is improved, fuel consumption and pollutant emissions are reduced

